

Card  
Printer

# DC-3300

Direct Thermal  
for heavy duty



## HIGHLIGHTS AT A GLANCE:

- High resolution printing with 300 x 1200 dpi
- Fast print speed for up to 220 cards/hour
- Edge-to-Edge printing
- High capacity card feeder
- Variety of smart card encoders
- Abundant extetnsions

**DASCOM**<sup>®</sup>  
SOLUTIONS FOR BUSINESS PRINTING


# DC-3300

Direct thermal printing technique is developed by making use of based on sublimation dye ribbon. When the ribbon and card pass through the print head, the head heats the dye on the ribbon. The dye will subsequently permeate to the card surface and produce color print. This type of printing produces high resolution clarity and is ideally suited for applications where photos or portrait-like quality is important. For example:

- Employee ID cards
- Student cards
- Membership cards
- Special certifications
- Health cards
- Resident cards

## TECHNICAL DATA

<b>Print Method</b>	Direct thermal technology
<b>Resolution</b>	300 x 1200 dpi
<b>Print Capability</b>	Single Side, Double Side (optional), Edge-to-Edge
<b>Print Speed</b>	Single Side: 220 cards/hour (YMCKO) or 1.000 cards/hour (Monochrome K) Double Side: 165 cards/hour (YMCKOK)
<b>Interfaces</b>	USB (2.0), Ethernet (10/100)
<b>Card Thickness</b>	0,25 - 1,25 mm (10 - 50 mil)
<b>Security Features</b>	RFID ribbon, custom watermarks (BMP)
<b>Card Loading</b>	Auto card feeder for 100 cards (0,76 mm thickness) Manual feed: single card Output 30 cards
<b>Card Types</b>	PVC, PET, PET-G, 85,6 x 53,98 mm (ISO ID-1/CR-80 size)
<b>Consumables</b>	Ribbon YMCKO (500 Images), Ribbon YMCKOO (400 Images), Ribbon YMCKOK (400 Images), Ribbon ½YMC KO (600 Images), Ribbon K (2.000 Images)
<b>Cleaning Set</b>	Cleaning Card Cleaning Roller
<b>Physical Weight</b>	7 kg
<b>Physical Size</b>	Single Side: 216 x 450 x 234 mm (W x D x H) Double Side: 216 x 550 x 234 mm (W x D x H)
<b>Noise</b>	55 dB(A) while printing 35 dB(A) in standby
<b>Power Voltage</b>	Auto wide ranging, 100 - 240 V AC - 50/60 Hz
<b>Environment</b>	Printing: +15° to +30° C Temperature; 35 - 95% Humidity Storage: +5° C to +45° C Temperature; 35 - 95% Humidity
<b>Driver</b>	Windows 7/8/10/11 (32 and 64 Bit), Windows Server 2012/2016/2019/2022, Linux macOS Monterey (12.x) Ventura (13.x), Sonoma (14.x), Sequia (15.x) for Intel and M chipset Linux
<b>Options</b>	Auto Flip-Flop; Encoder for MIFARE High capacity card feeder for 200 cards
<b>Warranty</b>	For more details please contact your local dealer

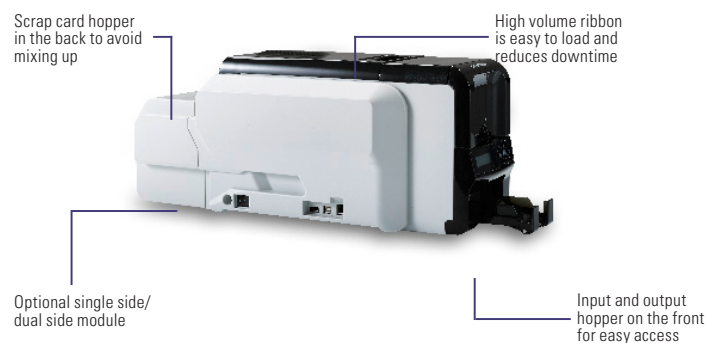

**DASCOM GB Ltd**  
Hart House, Priestley Road  
Basingstoke | Hampshire RG24 9PU | ENGLAND  
Tel.: +44 1256 355 130 | Fax: +44 1256 481 400  
info.gb@dascom-com | www.dascom.co.uk

**DASCOM Europe GmbH**  
Heuweg 3 | 89079 Ulm | GERMANY  
Tel.: +49 731 2075-0 | Fax: +49 731 2075-100  
info@dascom.com | www.dascomeurope.de

**DASCOM (Holdings) LTD.**  
R. 1811-1816A | Nan Fung Centre  
264-298 Castle Peak Road | Tuen Wan, N. T. | Hong Kong  
Tel.: +852 2498 1507 | Fax: +852 2413 6047